

深圳市奥蕾达科技有限公司

地址: 深圳市光明高新区七号路侨德科技园A栋1、2楼

总机: +86-755-3318 5366

传真: +86-755-8290 0599

官方网站: www.auroled.cn



欢迎访问订阅号



欢迎访问公司官网

服务热线: 4000755535

SHENZHEN AUROLED TECHNOLOGY CO.,LTD


ADD: 1.2 BldgA, Qiaode Technology Park, Guangming District, Shenzhen, Guangdong, China

Tel: +86-755-3318 5366

Fax: +86-755-8290 0599

Web: www.auroled.com

规格 Specification	ATOS 15	ATOS 20	ATOS 25	ATOS 31	ATOC 40	ATOC 55	ATOC 80
LED类型 LED Configuration	SMD				COB 三合一 COB 3 in 1		
像素间距 Pixel Pitch	15.625mm	20mm	25mm	31.25mm	40mm	55mm	80mm
通透率 Transparency	50%	65%	75%	80%	75%	85%	90%
最大亮度 Max. Brightness	6500cd/m ²	6500cd/m ²	6500cd/m ²	6500cd/m ²	3000cd/m ² 6500cd/m ²	2000cd/m ² 6500cd/m ²	1000cd/m ² 6500cd/m ²
重量 Weight	5kg/m ²	5kg/m ²	4kg/m ²	4kg/m ²	4kg/m ²	4kg/m ²	3.5kg/m ²
模组尺寸 Module Size	500*2000mm				480*4400mm		
最大功耗 Max. Power Consumption	800w/m ²				300w/m ² 600w/m ²	200w/m ² 600w/m ²	120w/m ² 600w/m ²
平均功耗 Ave. Power Consumption	200w/m ²				100w/m ² 200w/m ²	65w/m ² 200w/m ²	45w/m ² 200w/m ²
工作电压 Working Voltage	DC 5V		DC 7.5V		DC 7.5V DC 12V	DC 7.5V DC 12V	DC 7.5V DC 24V
输入电压 Input Voltage	AC 90~260V						
防水等级 IP Rating	IP 67						
刷新率 Refresh Rate	≥1920Hz						
可视角度 Viewing Angle	H: 120°; V: 120°						
工作温度 Working Temperature	-20~65°C						

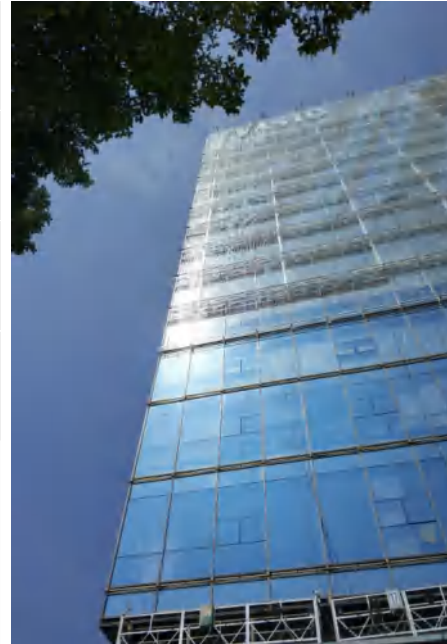

经典案例 广州科学城 "水舞声光秀"
Classic Case "The Dancing of Water And Light" Show, Guangzhou



AuroLED
户外透明屏系列
Outdoor Transparent LED Display

ATO 户外透明屏

ATOS&ATOC系列

Transparent LED Display - ATOS&ATOC series


户外系列透明屏是奥蕾达针对透明屏户外应用环境开发的一款创意LED显示屏，该产品集亮化与显示两大功能于一体，具有高亮度、高清晰度、高透明度等优点，屏体轻柔灵活可与各种造型的建筑幕墙完美融合，让其作为广告媒体的商业价值倍增。

该系列产品已经过近万平方的项目检验，产品被广泛应用于商业建筑、城市照明亮化、文化产业、旅游景点、创意天幕、舞台舞美等领域。

ATO Series is a creative transparent LED display developed by our company for the outdoor application environment, it integrates lighting and display functions together.

The product is highly transparent, highly brightness and lightweight. The screen is soft, flexible and can be perfectly integrated with various architectural curtain walls, making it a doubling commercial value for advertising media.

ATO Series has been tested by nearly 10,000 square meters projects, and its products are widely used in commercial buildings, urban lighting, cultural industries, tourist attractions, creative canopies, stage and other fields.

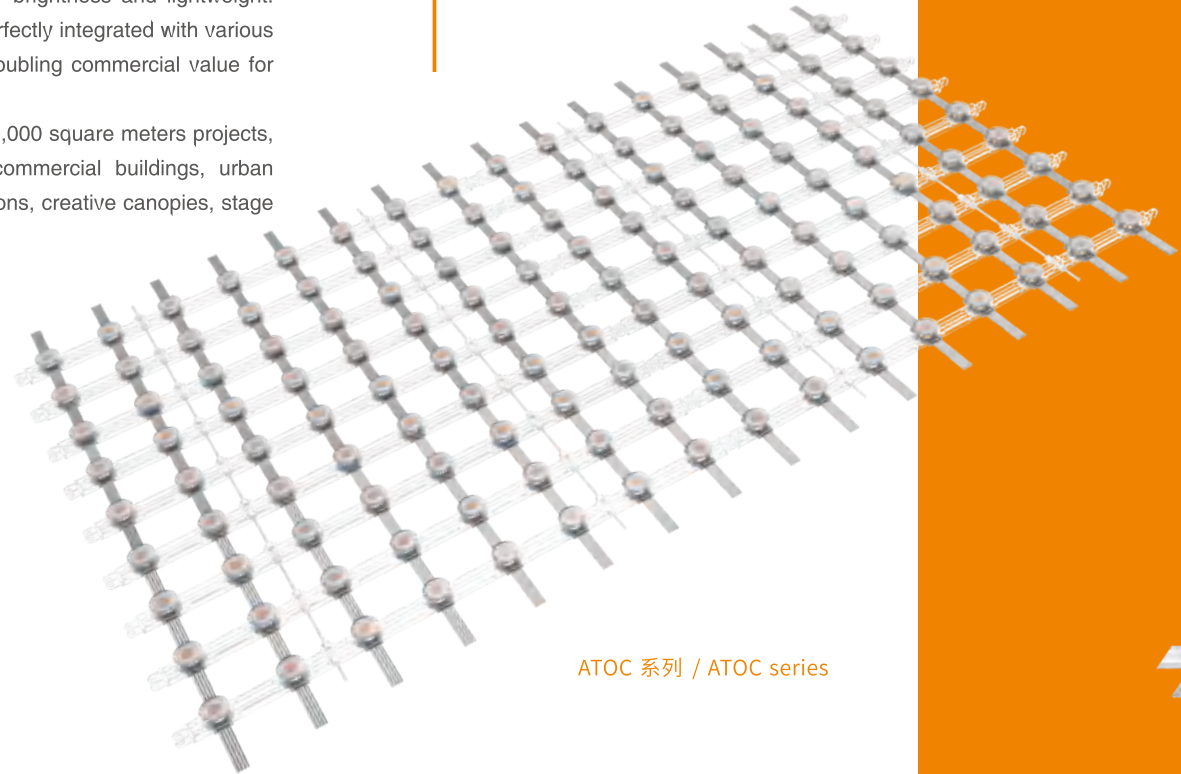

ATOC 系列 / ATOC series


屏体轻柔， 可适用于多种场景

屏体轻盈柔软，可任意弯曲、折叠、悬挂等，自由组合成各种形状，不受应用场景限制；
像素间距从16mm至200mm可供选择，可根据建筑面积、观看距离定制，多种像素清晰度满足不同场景的创意需求。

Soft And Flexible

The screen body is light and soft, can be arbitrarily curled and folded, suspended, etc., it can be freely combined into various shapes, which is not limited by the application scene;

The product specification range vary from 16mm to 200mm, which can be customized according to the building area and viewing distance, meeting the creative needs of different scenes.

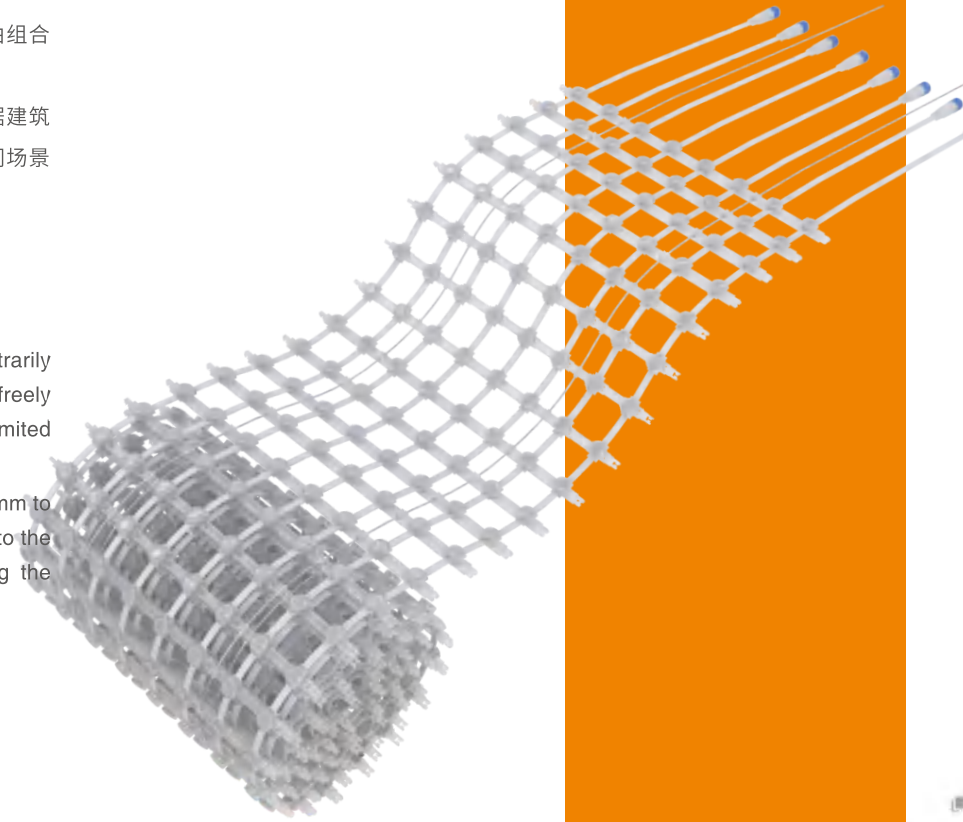


安装快捷，维护方便

简易安装结构，省时省力，不会影响原有墙体结构；
模块之间卡扣式组合，像素点和显示模块可单独插拔，易拆装，维护方便快捷。

Quick Installation And Easy Maintenance

Easy installation structure saves time and labor and will not affect the structure of the original wall;

Top side will be fixed by steel frame, easy to installation. Bayonet design for each module, easy to dis-assembly, strips and dots can be plug and unplug, make maintain more simple and easy.

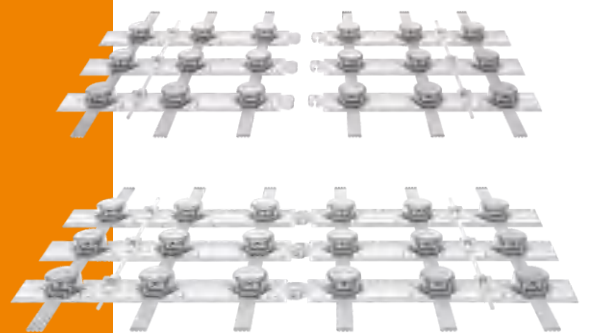

断点续传

采用高性能IC和双信号设计，单颗灯故障不影响整体显示效果，轻松更换故障光源，便可恢复如初。

Break-point Continuous Transmission


With high-performance IC and dual-signal design, single lamp failure does not affect the whole display effect, and it is easy to replace the fault light source.

IP67高防护等级

采用日本进口胶水灌胶，COB封装技术，防护等级达到IP67，防暴雨、防盐雾、防尘、抗污染、抗强风暴、抗UV，使用寿命长。

Waterproof, Corrosion Resistant

Adopting Japanese imported glue filling glue, COB packaging technology, protection grade reaches IP67, anti-storm, anti-salt fog, dust proof, anti-pollution, anti-strong storm, anti-UV, long service life.

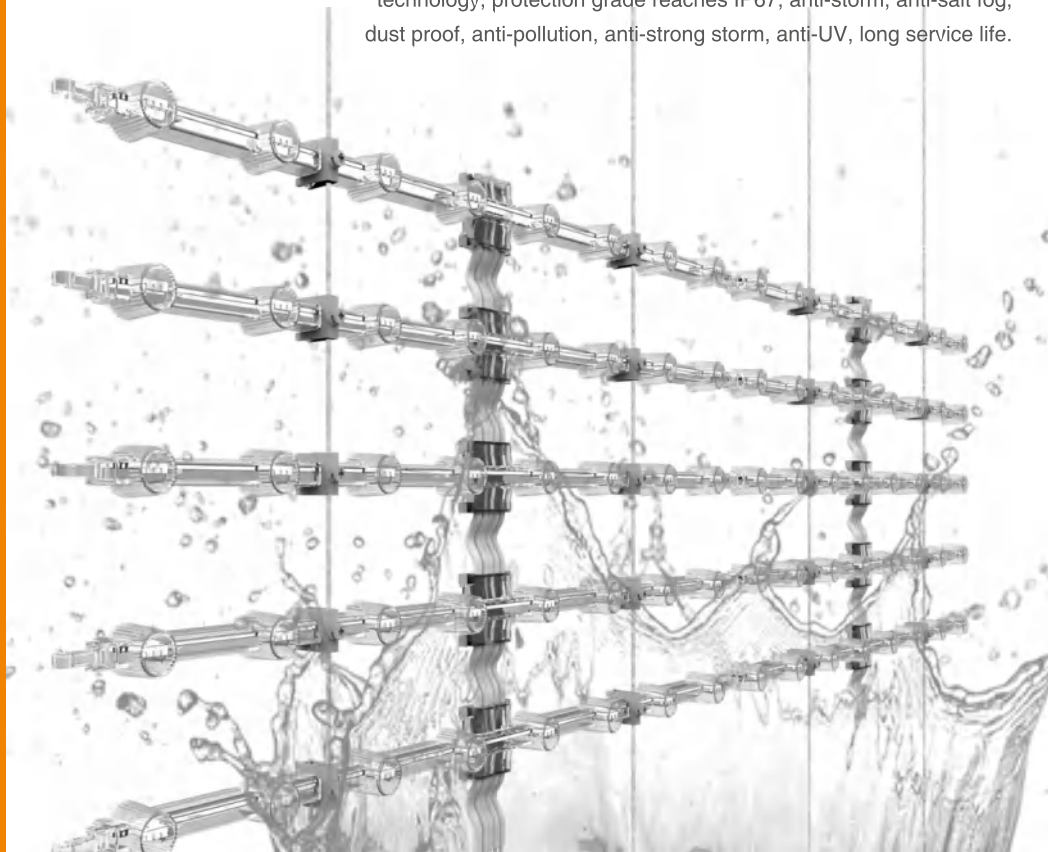


简洁外观，透光透风，广受高端项目青睐

通透度超过75%，透光透风，不影响建筑外观和室内采光及观看视线；COB封装技术，稳定性好，亮度最高可达6500cd，白天夜晚显示效果俱佳；12bit高灰度级别，高刷新率，画面播放流畅自然，显示清晰度高，也可兼容DMX512系统；可实现群楼光电一体化联动表演，已成为高端户外亮化项目的首选产品。

Simple appearance, light and air permeability

Permeability of more than 75%, light and air permeability, which does not affect the appearance of the building, indoor lighting and viewing; COB packaging technology, good stability, brightness up to 6500cd, good display during the day and night; 12bit high gray level, high refresh rate, smooth and natural picture play, high display resolution, and compatible with DMX512 system;

It can realize the photoelectric integrated integration performance of the group building, and has become the first choice for high-end outdoor lighting projects.

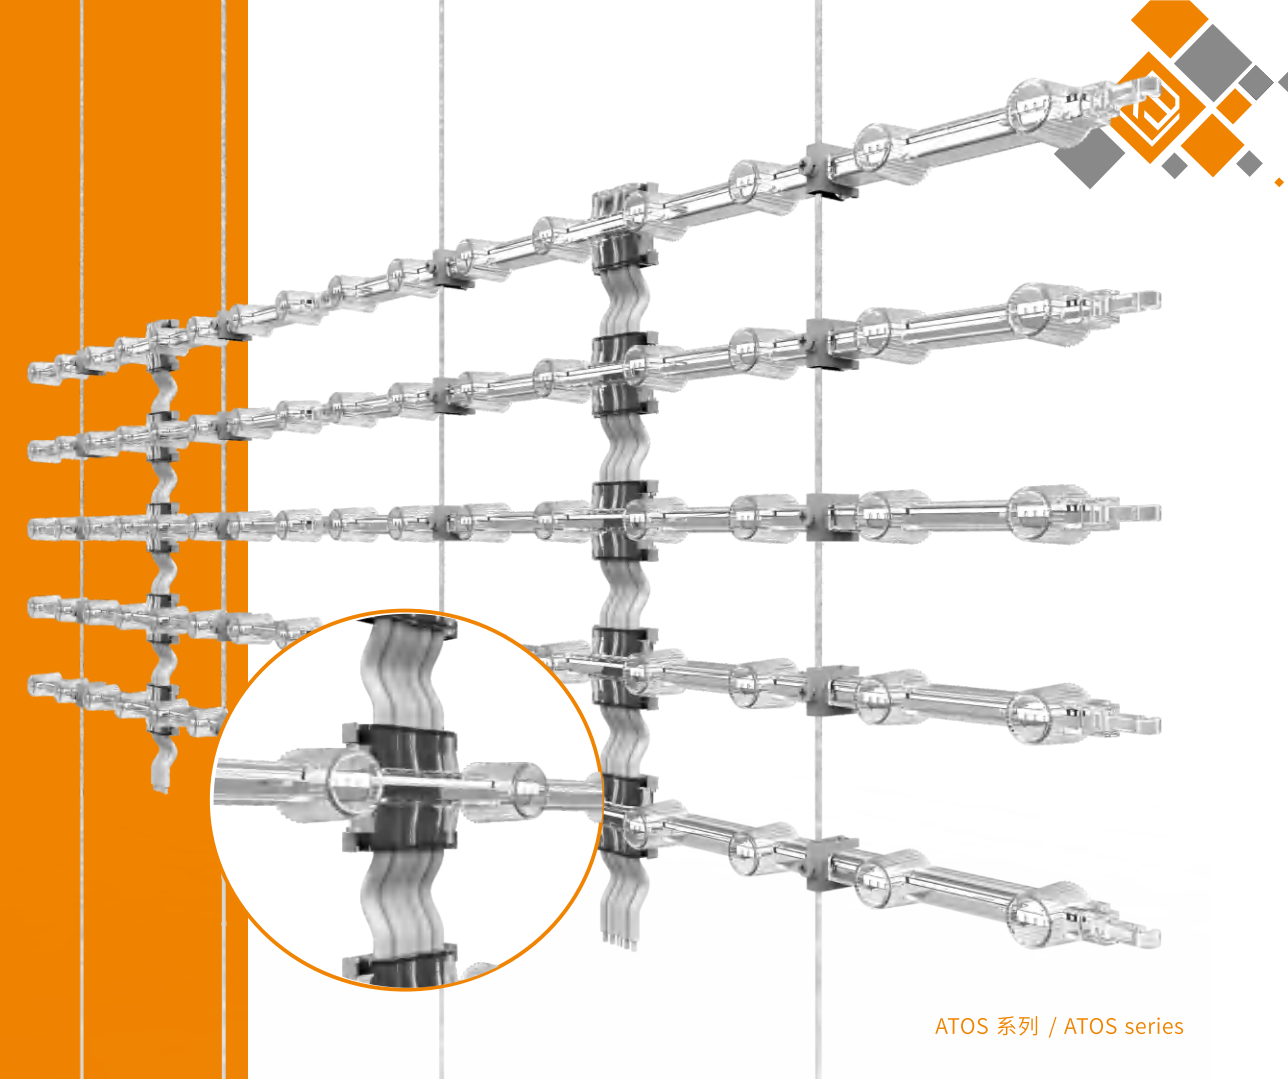

ATOS 系列 / ATOS series